


CONCENTRIC TWINAX TRB CONNECTORS

The TRB connector has a bayonet coupling design with a center contact and an intermediate cylindrical contact. The bayonet type can withstand severe shocks and vibrations. The most popular 3-slot/lug type is standard. Diagrams at the right illustrate mating configurations.

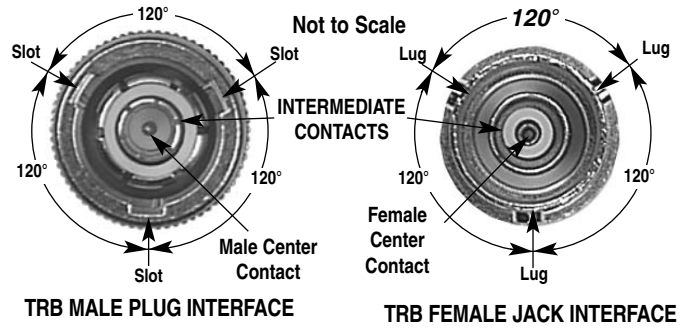

Tech Note: The center contact is high (positive) connected to the twinax blue wire and the cylindrical contact is low (negative) connected to the twinax white wire. The connector body is tied to the cable shield.


SOLDER/CLAMP CABLE PLUGS

PART NUMBER	CABLE	MATING INTERFACE
A 10-06030-210	30-02001, TWC-78-2, 9272	3-slot male plug
A 10-06030-231	30-02003, TWC-78-1	3-slot male plug
A 10-06030-206	M17/176-00002	3-slot male plug
A 10-06030-241	30-02002, TWAC-78-1F2	3-slot male plug





SOLDER/CLAMP CABLE PLUGS WITH BEND RELIEF

PART NUMBER	CABLE	MATING INTERFACE
B 10-06033-210	30-02001, TWC-78-2, 9272	3-slot male plug
B 10-06033-231	30-02003, TWC-78-1	3-slot male plug
B 10-06033-206	M17/176-00002	3-slot male plug
B 10-06033-241	30-02002, TWAC-78-1F2	3-slot male plug

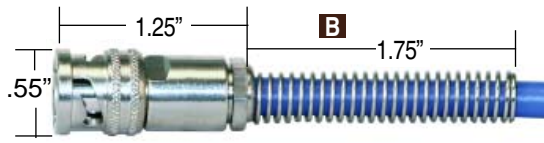

FULL CRIMP CABLE PLUGS

PART NUMBER	CABLE	MATING INTERFACE
C 10-06031-210	30-02001, TWC-78-2, 9272	3-slot male plug
C 10-06031-231	30-02003, TWC-78-1	3-slot male plug
C 10-06031-206	M17/176-00002	3-slot male plug
C 10-06031-241	30-02002, TWAC-78-1F2	3-slot male plug
D 10-06032-206	M17/176-00002	Rt angle 3-slot male plug

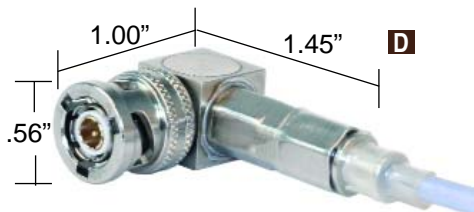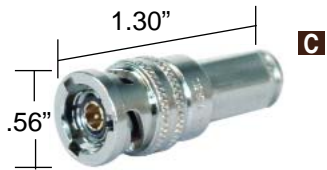

SOLDER/CLAMP CABLE JACKS

PART NUMBER	CABLE	MATING INTERFACE
E 10-06575-210	30-02001, TWC-78-2, 9272	3-lug female jack
E 10-06575-231	30-02003, TWC-78-1	3-lug female jack
E 10-06575-206	M17/176-00002	3-lug female jack
E 10-06575-241	30-02002, TWAC-78-1F2	3-lug female jack

